

AD-A045 995

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
OPTIMUM DIVISION OF THE OBSERVATION INTERVAL DURING THE DETECTI--ETC(U)
FEB 77 V M KATIKOV

F/G 17/9

UNCLASSIFIED

FTD-ID(RS)1-0189-77

NL

1 OF 1
AD
A045995




END

DATE
FILMED

11-77

DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A045995

FTD-ID(RS)I-0189-77

1


FOREIGN TECHNOLOGY DIVISION



OPTIMUM DIVISION OF THE OBSERVATION
INTERVAL DURING THE DETECTION OF SIGNALS
IN A RADIO LINE WITH ACTIVE RESPONSE

by

V. M. Katikov

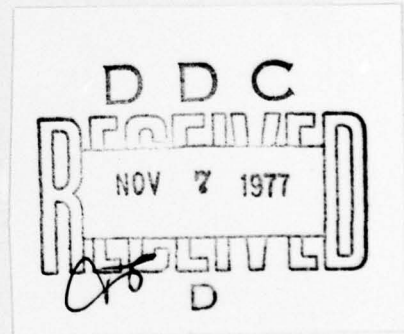

Approved for public release;
distribution unlimited.



ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. 209/OF SPECIAL
A	

FTD ID(RS)I-0189-77

EDITED TRANSLATION

FTD-ID(RS)I-0189-77

22 February 1977

77-77-C-000201

OPTIMUM DIVISION OF THE OBSERVATION INTERVAL
DURING THE DETECTION OF SIGNALS IN A RADIO LINE
WITH ACTIVE RESPONSE

By: V. M. Katikov

English pages: 5

Source: Izvestiya Leningradskogo Ordena Lenina
Elektrotekhnicheskogo Instituta Imeni
V. I. Ul'yanova, (Lenina), Leningrad,
NR 98, 1971, PP. 33-35.

Country of origin: USSR

Translated by: Gale M. Weisenbarger

Requester: FTD/ETCK

Approved for public release; distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

FTD ID(RS)I-0189-77

Date 22 Feb 19 77

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	А а	A, a	Р р	Р р	R, r
Б б	Б б	B, b	С с	С с	S, s
В в	В в	V, v	Т т	Т т	T, t
Г г	Г г	G, g	У у	У у	U, u
Д д	Д д	D, d	Ф ф	Ф ф	F, f
Е е	Е е	Ye, ye; E, e*	Х х	Х х	Kh, kh
Ж ж	Ж ж	Zh, zh	Ц ц	Ц ц	Ts, ts
З з	З з	Z, z	Ч ч	Ч ч	Ch, ch
И и	И и	I, i	Ш ш	Ш ш	Sh, sh
Й й	Й й	Y, y	Щ щ	Щ щ	Shch, shch
К к	К к	K, k	Ъ ъ	Ъ ъ	"
Л л	Л л	L, l	Ы ы	Ы ы	Y, y
М м	М м	M, m	Ь ь	Ь ь	'
Н н	Н н	N, n	Э э	Э э	E, e
О о	О о	O, o	Ю ю	Ю ю	Yu, yu
П п	П п	P, p	Я я	Я я	Ya, ya

*ye initially, after vowels, and after ъ, ь; e elsewhere.
 When written as ё in Russian, transliterate as yě or ë.
 The use of diacritical marks is preferred, but such marks may be omitted when expediency dictates.

GREEK ALPHABET

Alpha	A α α	Nu	N ν
Beta	B β	Xi	Ξ ξ
Gamma	Γ γ	Omicron	Ο ο
Delta	Δ δ	Pi	Π π
Epsilon	Ε ε ε	Rho	Ρ ρ ϱ
Zeta	Ζ ζ	Sigma	Σ σ ς
Eta	Η η	Tau	Τ τ
Theta	Θ θ ϑ	Upsilon	Υ υ
Iota	Ι ι	Phi	Φ φ ϕ
Kappa	Κ κ κ	Chi	Χ χ
Lambda	Λ λ	Psi	Ψ ψ
Mu	Μ μ	Omega	Ω ω

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English
---------	---------

sin	sin
cos	cos
tg	tan
ctg	cot
sec	sec
cosec	csc
sh	sinh
ch	cosh
th	tanh
cth	coth
sch	sech
csch	csch
arc sin	sin ⁻¹
arc cos	cos ⁻¹
arc tg	tan ⁻¹
arc ctg	cot ⁻¹
arc sec	sec ⁻¹
arc cosec	csc ⁻¹
arc sh	sinh ⁻¹
arc ch	cosh ⁻¹
arc th	tanh ⁻¹
arc cth	coth ⁻¹
arc sch	sech ⁻¹
arc csch	csch ⁻¹

rot	curl
lg	log

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

OPTIMUM DIVISION OF THE OBSERVATION INTERVAL DURING THE DETECTION OF
SIGNALS IN A RADIO LINE WITH ACTIVE RESPONSE

V. M. Katikov

The detection procedure in a radar device with active response, in the general case, has two stages. In the first stage (during interval T_1) inquiry signals are detected in the receiver of the transponder and in the second stage (interval T_2) the reply signals are detected. The quality of detection (probability of errors) in the first and second stages under the influence of interference is determined by values T_1 and T_2 and therefore in the case of a limited total observation interval ($T = T_1 + T_2$) the problem arises of its subdivision into two parts.

Let us examine a discrete model for sampling data which is
FTD-ID(RS)I-0189-77

applicable for the cases of greatest practical interest. In interval T_1 let the detector of the transponder receive n_1 random values of a mixture of the inquiry signal and interference. At the end of interval T_1 the reply signal is characterized by the probability of a correct response p_m . The on-board detector carries out joint processing of n_2 random values received in interval T_2 of the response signal. The total number of random values $n = n_1 + n_2$ is limited by the given observation interval $T = T_1 + T_2$. The quality of detection is characterized by a target function $F(n_1, p_m)$.

We shall look for the point (n_1^*, p_m^*) , which yields the maximum of the target function in the set of points (n_1, p_m) , which satisfy the assigned condition of communication, i.e., we shall look for the joint solution (if it exists) of the system of equations:

$$(1) \quad \begin{cases} F(n_1^*, p_m^*) = \max_{n_1, p_m} F(n_1, p_m) \\ p_m^* = p(n_1^*) = p(n - n_1^* + 1) \end{cases}$$

For this, let us represent the first difference of the target function in the form:

$$(2) \quad \Delta F(n_1, p_m) = F(n_1, p_m) - F(n_1 - 1, p_m) = \Delta F_{n_1}(n_1) - \Delta F_{p_m}(p_m),$$

where

FTD-ID(RS)I-0189-77

$$\Delta F_{n_k}(n_k) = F(n_k, p_{n_k}) - F(n_{k-1}, p_{n_k}); \Delta F_{n_{k+1}}(p_{n_{k+1}}) = F(n_k, p_{n_{k+1}}) - F(n_{k-1}, p_{n_k}).$$

Then the extremal point $(n_k^*, p_{n_k}^*)$, determined by (1) must satisfy the following system of inequalities:

$$\begin{aligned} (3a) \quad & \Delta F_{n_k}(n_k) \geq \Delta F_{n_{k+1}}(p_{n_{k+1}}) \\ (3b) \quad & \Delta F_{n_{k+1}}(n_{k+1}) \leq \Delta F_{n_k}(p_{n_k}). \end{aligned}$$

Considering the convexity and continuity of the target function with respect to argument p_k in the range of the maximum it is possible to write sufficient conditions of the maximum following from (3):

$$\begin{aligned} (4a) \quad & \Delta F_{n_k}(n_k) \geq F'_{n_{k+1}}(p_{n_k})[p_{n_{k+1}} - p_{n_k}] \\ (4b) \quad & \Delta F_{n_{k+1}}(n_{k+1}) \leq F'_{n_k}(p_{n_k})[p_{n_k} - p_{n_{k+1}}]; \end{aligned}$$

During binary processing of the reply signals for the target function one can use the cumulative function of binomial distribution which determines the probability of correct detection:

$$(5) \quad F(n, p) = \sum_{k=0}^n \binom{n}{k} p^k (1-p)^{n-k}.$$

Using the known properties of this function [1]

FTD-ID(RS)I-0189-77

(6)

$$F'_n(p) = \frac{\partial}{\partial p} F(n, p) = m \binom{n}{m} p^{m-1} (1-p)^{n-m}$$

(7)

$$\Delta F_p(n) = F(n, p) - F(n-1, p) = \binom{n-1}{m-1} p^m (1-p)^{n-m},$$

for the examined case we finally obtain:

(8a)

$$\left\{ \begin{aligned} p_{n+1} - p_n &\leq \frac{p_n(1-p_n)}{n_2 - m} \end{aligned} \right.$$

(8b)

$$\left\{ \begin{aligned} p_n - p_{n-1} &\geq \frac{p_n(1-p_n)}{n_2 - m + 1} \left(\frac{p_{n-1}}{p_n} \right)^m \left(\frac{1-p_{n-1}}{1-p_n} \right)^{n_2-m} \end{aligned} \right.$$

The obtained expressions (8) make it possible to find the optimum subdivision of the selection of a given volume (n) between the on-board detector (n_1^*) and the active transponder (n_2^*) with the assigned function of the quality of the response $p_n = p(n)$.

In the range defined by the inequality (8a) the target function necessarily increases with an increase of n_2 and in the range of inequality (8b), necessarily decreases. The extremal point (n_1^*, p^*) is located in the area of intersection of inequalities (8a) and (8b) or in the area of indeterminacy (incompatibility of the inequalities).

It should be remembered that the obtained expressions are valid

in the area of convexity of the target function with respect to the argument p_n . The boundary of this area can easily be found according to the well-known rule of determination of the inflection point which for function (5) leads to the following inequality giving the area of convexity:

$$(9) \quad p_n \geq \frac{m-1}{n-1}.$$

More specific definition of expression (8) is possible in the case of the assigned analytical dependence $p_n = p(n)$.

LITERATURE

1. Tables of the Cumulative Binomial Probability Distribution, Cambridge, Mass., 1955.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
FTD-ID(RS)I-0189-77		
4. TITLE (and Subtitle) OPTIMUM DIVISION OF THE OBSERVATION INTERVAL DURING THE DETECTION OF SIGNALS IN A RADIO LINE WITH ACTIVE RESPONSE		5. TYPE OF REPORT & PERIOD COVERED Translation
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) V. M. Katikov		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Foreign Technology Division Air Force Systems Command U. S. Air Force		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE 1971
		13. NUMBER OF PAGES 5
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) 17		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/ RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
C557 USAIIC	1	NIA/PHS	1
C591 PSTC	5	NICD	5
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	2		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NAVWPNSCEN (Code 121)	1		
NASA/KSI	1		
544 IES/RDPO	1		
AFIT/LD	1		

FTD-ID(RS)I-0189-77